


Meyer Burger Glass

Heterojunction Bifacial Module



Maximum performance

Up to 20 percent more energy yield – even in low-light conditions, such as in the morning and evening hours or with cloudy skies




Maximum quality

Production of solar cells and modules according to the highest standards and exclusively in Germany



Maximum durability

Guaranteed yields for decades



Maximum stability

Patented SmartWire technology makes the modules extremely rugged and efficient




Maximum elegance

Understated and superb design – invented in Switzerland

Meyer Burger (Industries) GmbH


Carl-Schiffner-Str. 17
09599 Freiberg
Germany

www.meyerburger.com

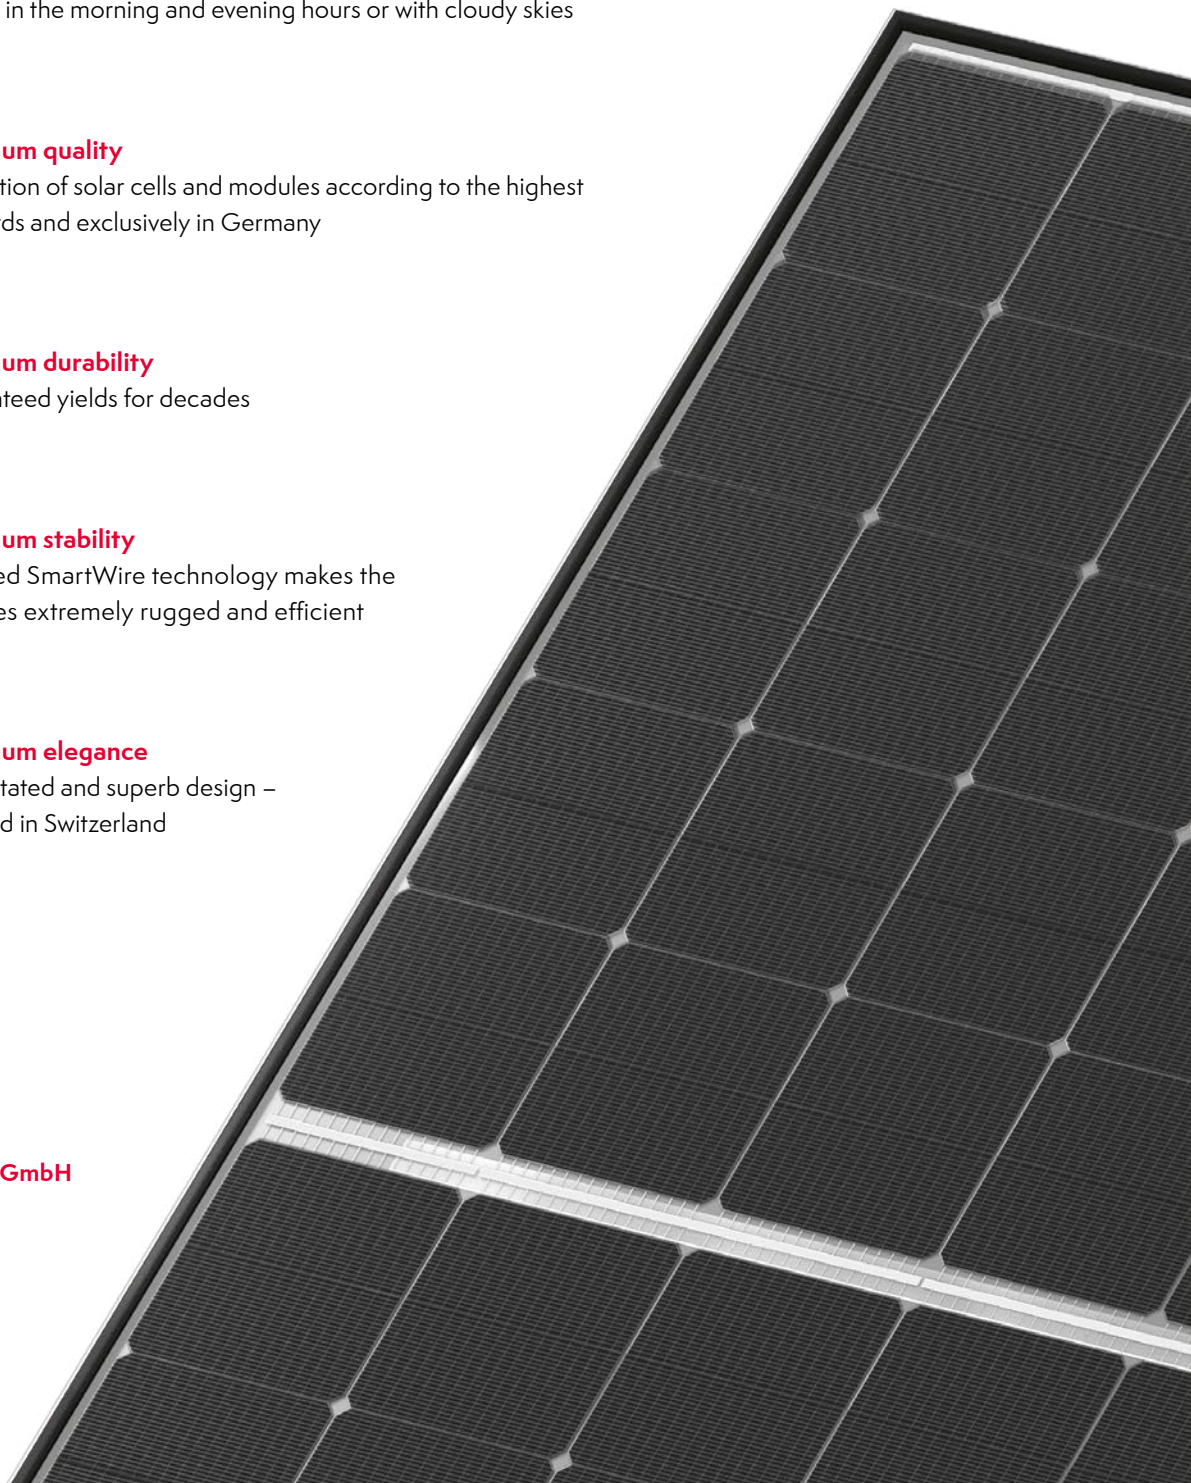

MECHANICAL SPECIFICATION

Dimensions [mm]	1,722 x 1,041 x 35
Weight [kg]	24.4
Front cover	Solar glass, 2,1 mm, with anti-reflective surface
Back cover	Solar glass, 2,1 mm
Frame	Anodized aluminum (black)
Solar cell type	120 half-cut, mono n-Si, HJT
Junction boxes	3 diodes, IP68 rated, in accordance with IEC 62790
Cable	PV cable 4 mm ² , 1.2 m length, in accordance with EN 50618
Connectors	MC4-Evo2, in accordance with IEC 62852, IP68 rated only when connected

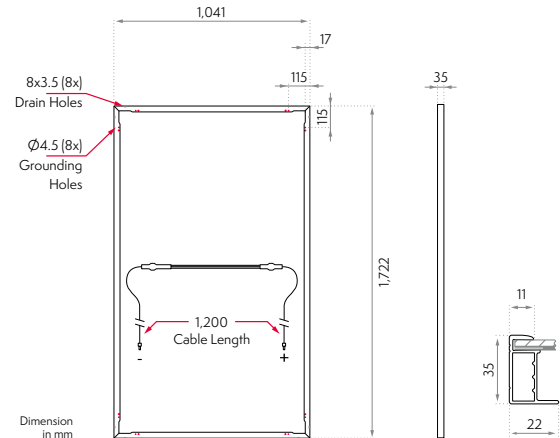

ELECTRICAL SPECIFICATION¹

Power class in STC ² [W _p]			370		375		380		385		390	
Minimum Performance	Minimum Performance (Power Tolerance -0 W/+5 W) [W _p]		STC	NMOT ³	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	Power at MPP	P _{mpp} [W]	370	284	375	286	380	291	385	295	390	296
	Short Circuit Current	I _{sc} [A]	10.4	8.4	10.4	8.4	10.5	8.5	10.6	8.6	10.7	8.6
	Open Circuit Voltage	V _{oc} [V]	44.5	41.9	44.6	42.0	44.7	42.1	44.7	42.1	44.7	42.1
	Current at MPP	I _{mp} [A]	9.9	8.0	9.9	8.0	10.0	8.1	10.1	8.2	10.2	8.2
	Voltage at MPP	V _{mpp} [V]	37.7	35.5	37.9	35.7	38.1	35.9	38.2	36.0	38.3	36.1
	Efficiency	η [%]	20.6		20.9		21.2		21.5		21.8	

Bifacial Specifications

Bifaciality Factor	[%]	90±2
--------------------	-----	------


Power with rear irradiation [W/m ²] ^{4,5}	P _{max} [W]	I _{sc} [A]	P _{max} [W]	I _{sc} [A]	P _{max} [W]	I _{sc} [A]	P _{max} [W]	I _{sc} [A]	P _{max} [W]	I _{sc} [A]
Bifi50	386	10.9	391	10.9	396	11.0	401	11.1	406	11.2
Bifi100	403	11.3	408	11.3	413	11.4	418	11.5	423	11.6
BSTC ⁵	414	11.6	419	11.6	424	11.7	429	11.8	434	11.9
Bifi200	436	12.2	441	12.2	446	12.3	451	12.4	456	12.5
Bifi250	452	12.7	457	12.7	462	12.8	467	12.9	472	13.0

Temperature Coefficients

Temperature Coefficient of I _{sc}	α	[%/°C]	+0.033
Temperature Coefficient of V _{oc}	β	[%/°C]	-0.234
Temperature Coefficient of P _{MPP}	γ	[%/°C]	-0.259
Nominal Module Operating Temperature	NMOT	[°C]	43±3

The temperature coefficients stated are linear values

Performance at different irradiance

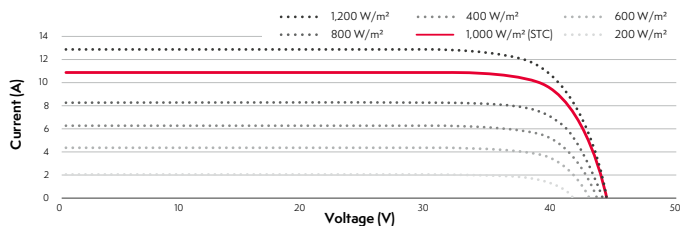

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage	[V]	1,500
Maximum Series Fuse Rating	[A]	18
Max. Test Load +/- (incl. Safety Factor of 1.5)	[Pa]	5,400/2,400
Fire class according to EN 13501-1		B2
Operation Temperature	°C	-40 to +85

MEYER BURGER WARRANTY

Product Warranty [y]	30
Power Warranty [y]	30
Power after 1 year	≥99% of nominal power
Annual Degradation [%/y]	0.20
Power after 30 years	≥93.2% of nominal power

Warranty conditions apply

CERTIFICATES

Certifications

IEC 61215:2016, IEC 61730:2016

Certifications (to come)

UL61730-1, UL 61730-2, PID (IEC 62804), Salt Mist (IEC 61701), Ammonia Resistance (IEC 62716), Dynamical Mechanical Load (IEC, 62782:2016), Dust & Sand (IEC 60068)

Notice: All data and specifications are preliminary and subject to change without notice.

Made in Germany.
Designed in Switzerland.



WEEE-Reg.-Nr. DE 18170271

¹ Measurement according to IEC 60904-3, measurement tolerance: ±3%, monofacial measurement with rear side covered
² STC: Irradiance 1000 W/m², 25 °C, AM1.5 Spectrum
³ NMOT: Nominal Module Operating Temperature, with irradiance 800 W/m², AM1.5 Spectrum, 20 °C, wind speed 1 m/s
⁴ According to IEC TS 60904-1-2, with rear irradiances of 50, 100, 200 and 250 W/m²
⁵ According to TÜV 2 PIG 2645/11.17, with a rear irradiance of 135 W/m²